

SAMSUNG

User-friendly Professional LCD Touch Keyboard



5" TFT Touch LCD System Control Keyboard

SPC-6000

The SPC-6000 is able to control up to 255 individual PTZ domes, DVRs and matrix switchers. It can be used in conjunction with up to 16 additional SPC-6000 units providing flexible expansion up to very large systems with user-friendly centralized control. The built-in 5" colour LCD touch panel provides an easy way to select camera locations and navigate control features such as video playback and preset positions, making it easy to manage a complete CCTV system. The 3D joystick and jog shuttle can be detached and placed on either the left or the right hand side of the controller making it suitable for left and right handed operation and it's ergonomic design makes it very comfortable for use over sustained periods.

- Built-in 5" colour TFT touch LCD screen
- Centralized control - up to 255 units with a single controller
- Flexible expansion to larger systems - up to 16 controllers
- 3D joystick to control PTZ functions
- Detachable joystick/jog shuttle for left/right handed use
- Multi-protocol support

5" TFT Touch LCD System Control Keyboard

SPC-6000




Specifications

SPC-6000	
COMMUNICATION	
Interface	RS-485/422 (Operating distance 1km), TTL (Matrix)
Data Port	8-pin RJ-45 connector (Female) (RS-485 serial port) BNC (Video input, Loop through), USB 2.0 (F/W updatable)
Baud Rate	2,400 ~ 38,400bps
Control Unit	255unit (PTZ / DVR / MATRIX / RECEIVER)
PTZ	SRD, SVR, SRP, Pelco-D/P, Panasonic, Vicon, AD, Honeywell, ELMO, Bosch, GE
DVR	Samsung-T/E
Protocol	Matrix SMX-25632
Receiver	Samsung-T
OPERATIONAL	
LCD Display	5" TFT touch LCD
Joystick	3 Axis twist zoom
Jog Shuttle	DVR playback control
On Screen Display	English, French, German, Spanish, Italian, Chinese, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese
ENVIRONMENTAL	
Operating Temperature	0°C ~ 40°C
Operating Humidity	10 ~ 70% (Non-condensing)
ELECTRICAL	
Input Voltage / Current	12V DC / 4A
Power Consumption	Max. 4W
MECHANICAL	
Dimensions (WxHxD)	459 x 59 x 178mm (18.07" x 2.32" x 7")
Weight	1.5Kg (3.3 lb)

Dimensions

Unit : mm (inch)

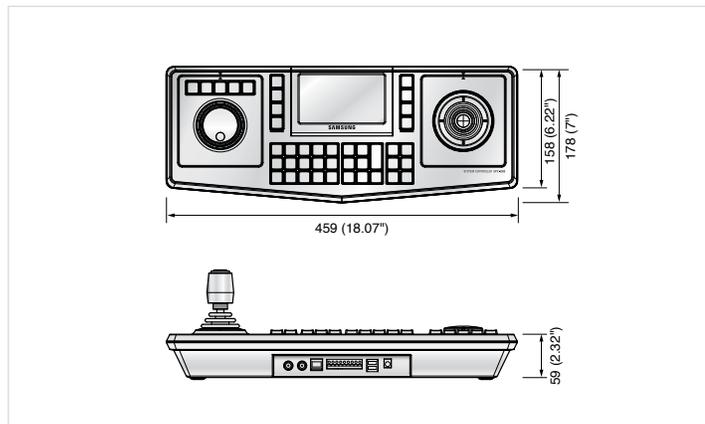

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

■ DISTRIBUTED BY

