

# Unparalleled Sharpness

## New lens series



1/2" C-mount 20X Motorized Zoom Lens

## SLA-12240

- 20X optical zoom, 12 ~ 240mm / 0.47" ~ 9.45"
- Sharp and clear image in low light with F1.6
- F1.6 DC Type auto iris

1/2" CS-mount Varifocal Lens

## SLA-612DN

- F1.6 DC Type auto iris
- Varifocal 6 ~ 12mm / 0.24" ~ 0.47"

# 1/2", 1/3" C-mount 20X Motorized Zoom Lens/CS-mount Varifocal Lens

# SLA-12240/612DN




## Specifications

	SLA-12240	SLA-612DN
CCD	1/2"	1/2"
Iris Type	Auto Iris (DC)	Auto Iris (DC)
Object Distance	2.8m ~ ∞	0.2m ~ ∞
Zoom	20X	2X
Mount	C-Mount	CS-Mount
Focal Length	12 ~ 240mm / 0.47" ~ 9.45"	6 ~ 12mm / 0.24" ~ 0.47"
Max. Aperture Ratio	F 1.6	F 1.6
Angle of View	Diagonal	38.9° ~ 1.9°
	Horizontal	30.8° ~ 1.6°
	Vertical	23° ~ 1.2°
Operation	Iris	F 1.6 ~ F 720C
	Focus	2.8m ~ ∞
	Zoom	12 ~ 240mm / 0.47" ~ 9.45"
Control	Iris	3.3V DC
	Focus	6 ~ 12V DC
	Zoom	6 ~ 12V DC
Back Focal Length	19.82mm / 0.78"	7.55 ~ 12.13mm / 0.3" ~ 0.48"
Flange Back Length	17.526mm / 0.69"	12.5mm / 0.49"
Preset	Built-in	-
Input Signal	Video Signal (V or VS)	-
Sensitivity Adjustment	0.5V(p-p) ~ 1.0V(p-p) (Video Signal)	-
Operating Temperature	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)
Dimensions (WxHxD)	116 x 135 x 223.5mm (4.57" x 5.31" x 8.8")	40.4 x 45.7 x 43.5mm (1.6" x 1.8" x 1.71")
Weight	2.6Kg (5.73 lb)	53g (0.12 lb)

## Dimensions

Unit : mm (inch)

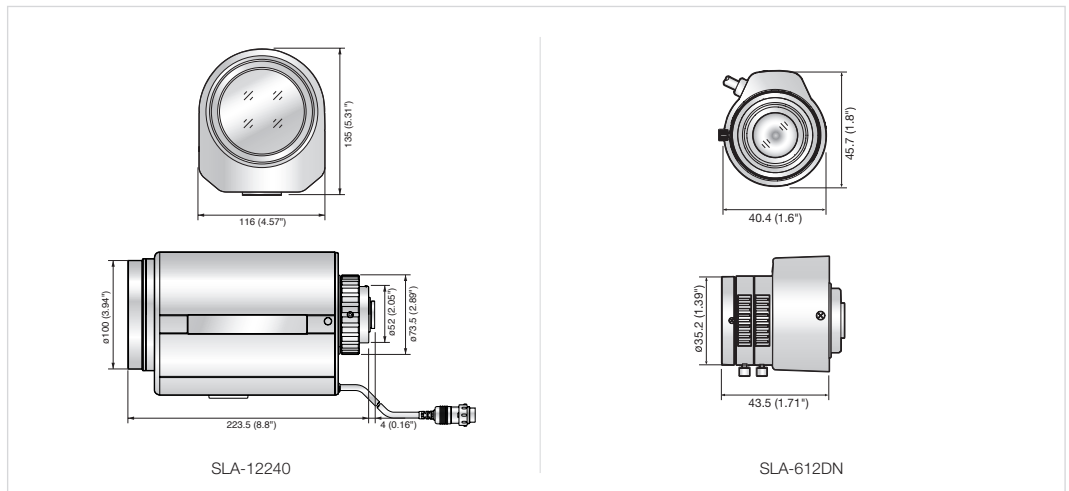

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

■ DISTRIBUTED BY

